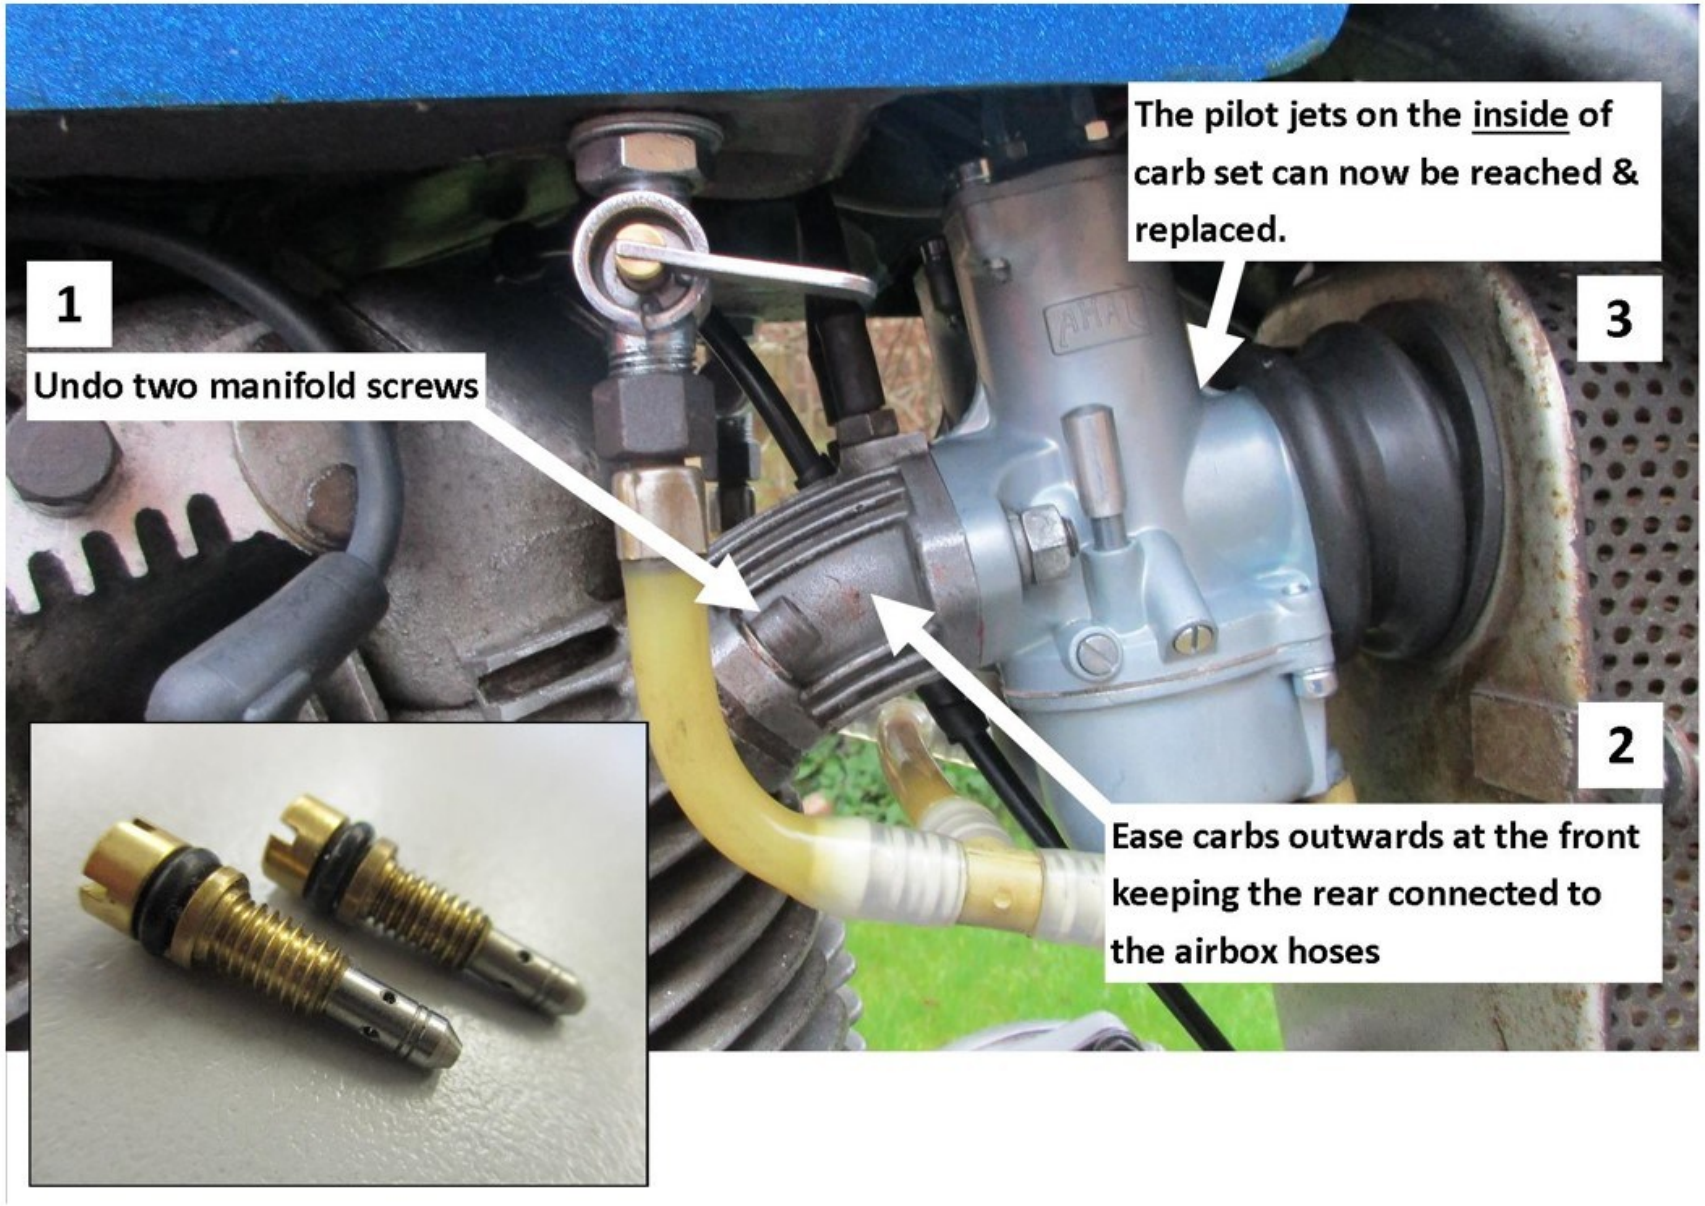
1
Undo two manifold screws
The pilot jets on the inside of carb set can now be reached & replaced.
3
2
Ease carbs outwards at the front keeping the rear connected to the airbox hoses